


ProCon E 26 Gas Condensing Boiler.

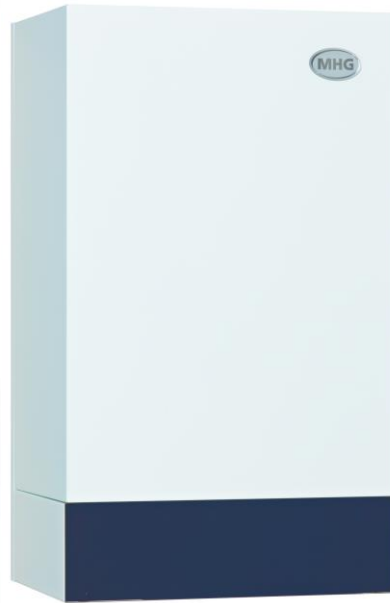


- Wall hung gas-condensing boiler modulating output From 2.7kW to 26kW.
- Direct on Boiler weather compensation as standard.
- Integral cascade controls on the models.
- Extremely high energy efficiency with fuel engineering related efficiency of up to 108.2%.
- Additional energy savings thanks to the wide modulation range of 1:10 with flexible output adjustment to suit heating requirements.
- Extremely low emissions through the use of the modulating, low maintenance ECONOX pre-mix radiant burner.
- High-performance heat exchangers made from stainless steel guarantee excellent reliability and a long service life.
- Room sealed operation available as standard.
- Simple, uncomplicated design and easy access to all components makes assembly and servicing easier.
- 3 Year parts and labour warranty, 5 year heat exchanger warranty

MHG Heating Ltd Unit 4 Epsom Downs Metro Centre, Waterfield, Tadworth, Surrey. KT20 5LR
Phone 08456 448802 Fax 08456 448803 Email info@mhgheating.co.uk web www.mhgheating.co.uk

ProCon E 26 Gas Condensing Boiler.

Technical Data		Units	E 26
Nominal Heat Input Net	Min/Max	kW	2.9/24.9
Operating Efficiency (40°C/30°C)		%	108.2
Nominal Heat Output (50°C/30°C)	Min/Max	kW	3.3/26.0
Nominal Heat Output (80°C/60°C)	Min/Max	kW	2.7/24.1
Gas Inlet Pressure	Min/Max	Mbar	18/60
Available Fan Pressure		Pa	200
Maximum Water Pressure	(Hot)	bar	1
Minimum Water Pressure	(Cold)	bar	3
Maximum Flow Temperature		°C	90
Power Supply (230 V / 50 Hz)		Amps	3
Max Power Consumption		Watts	98
Water Content		Ltrs	2.8
Internal Expansion Vessel		Ltrs	10
Lift Weight (Dry)		kg	43
Flue Classification		~	B ₂₃ , B _{23P} , B ₃₃ , C _{13X} , C _{33X} , C _{43X} , C _{63X} , C _{93X}

Dimensions

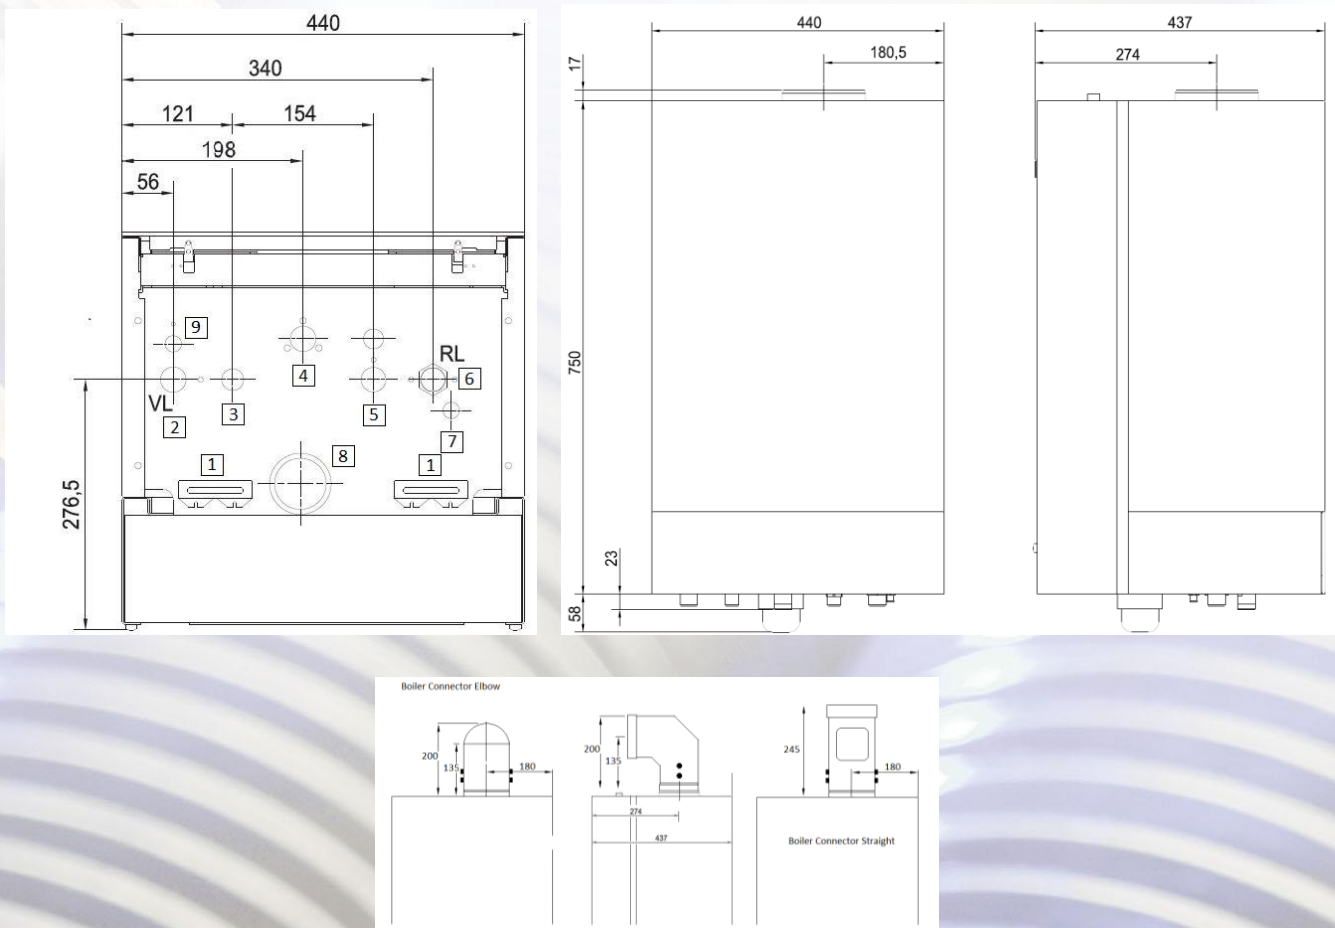

MHG Heating Ltd Unit 4 Epsom Downs Metro Centre, Waterfield, Tadworth, Surrey. KT20 5LR
 Phone 08456 448802 Fax 08456 448803 Email info@mhgheating.co.uk web www.mhgheating.co.uk

